

FRONT ELEVATION

Scale 1:15 at A3

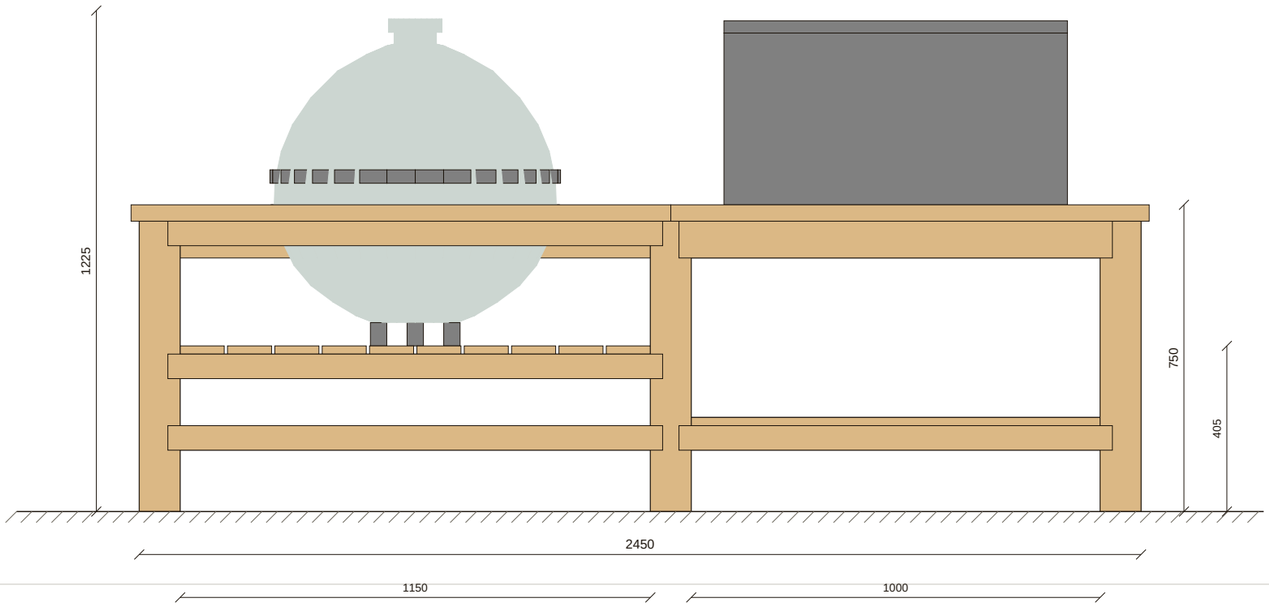


PLAN

Scale 1:15 at A3 · top removed, dashed line is the top · front at bottom

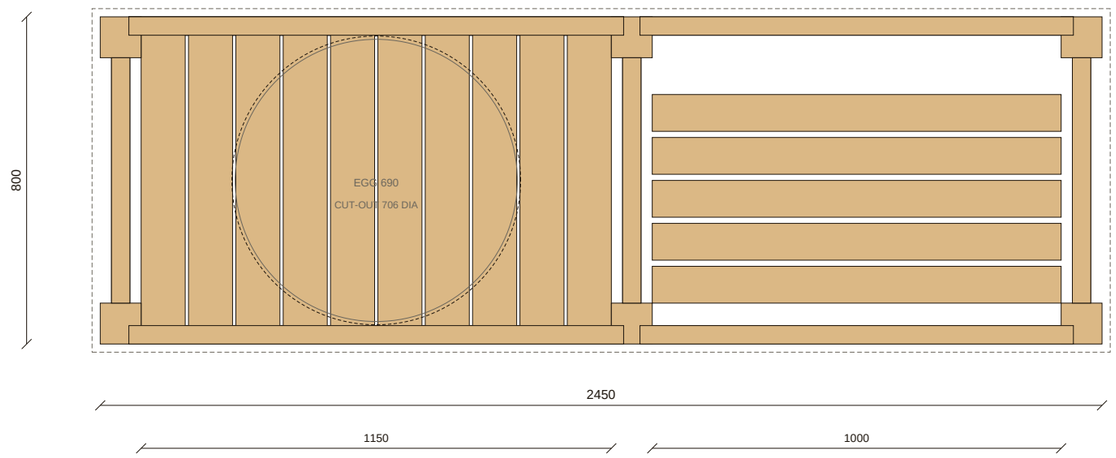


END ELEVATION

Scale 1:20 at A3

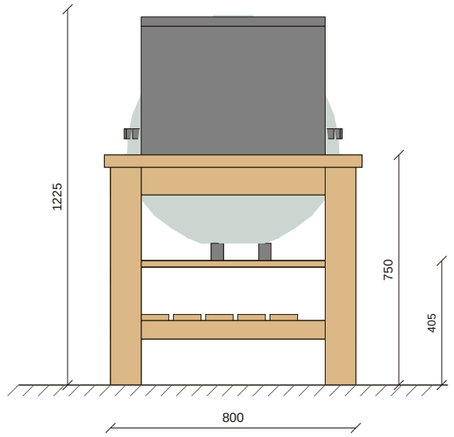

SECTION A-A

Scale 1:20 at A3 · through the Egg centre line

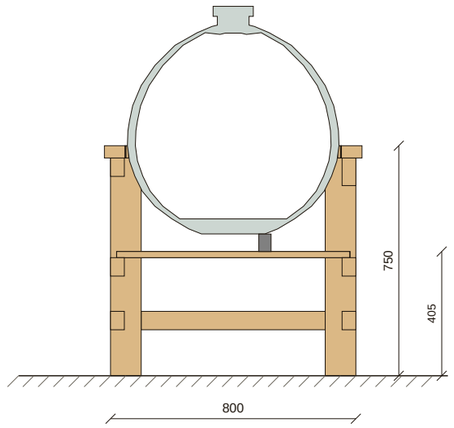

GENERAL NOTES

1. All dimensions in millimetres unless stated. Do not scale from this drawing.
2. Iroko frame, mortice and tenon joints pegged with 12 dia pegs, oiled [CHECK].
3. Sizes typical. Cut-out, shelf height and clearances confirmed against the Egg or kamado model before cutting any timber.
4. Designed around a Big Green Egg XLarge (shell about 690 dia) [CHECK]. Overall size, bay widths and height are to be confirmed against the exact Egg or kamado model [CHECK].
5. The Egg stands on its own feet on the oak egg shelf, 405 mm above the floor, and the top is cut away around it so the dome and upper bowl sit proud of the top. Cut-out 706 dia, shelf height and clearances confirmed against the Egg model [CHECK].
6. Table height 750 mm to top surface [CHECK].
7. Iroko, oiled [CHECK]. Top and stone details to specification [CHECK].

TIMBER SCHEDULE - ENGLISH OAK

MEMBER	SECTION	NO.	LENGTH
Egg shelf board	107 x 20	10	7.6 m
Lower shelf slat	90 x 20	5	5.0 m
Lower rail	60 x 45	4	4.9 m
Post	100 x 100	6	4.3 m
Top rail	90 x 45	3	3.6 m
Egg shelf rail	60 x 45	2	2.6 m
Side rail	90 x 45	3	2.5 m
Lower side rail	60 x 45	3	2.5 m
Top board (glued panel)	40 thick x 840	2	2.5 m
Top rail	60 x 45	1	1.3 m

Quantities and lengths indicative, from the drawing model.
All [CHECK] with structural engineer and at site visit.

FIRE & OAK
OUTDOOR KITCHENS & SPACES

EGG & KAMADO TABLES

Egg and Asado Combination · XLarge Egg

Plan, elevations and section

DRAWING NO.	SCALE
FO-TBL-COMBOXL-C1	1:15 / 1:15 at A3
DATE	SHEET
07.10.2026	1 of 2

STATUS

PRELIMINARY · REV P2

For design intent. Not for construction.

[CHECK] items confirmed against your Egg model.

Fire & Oak Outdoors


fireandoakoutdoors.co.uk

hello@fireandoakoutdoors.co.uk

SETTING-OUT RODS


Everything the workshop needs to cut and assemble one table, read off three rods

HEIGHT ROD 1:5

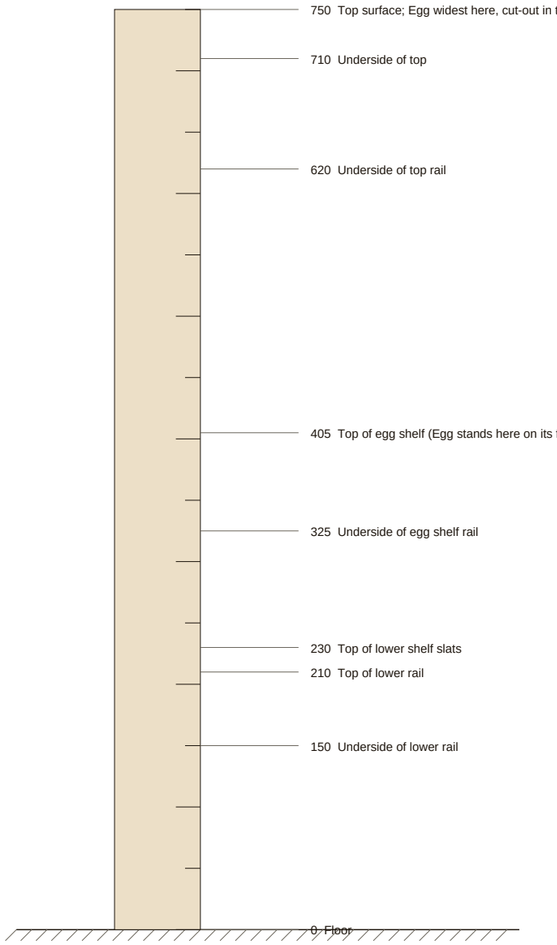


Posts 100 x 100 x 710 long, cut from this rod

WIDTH ROD 1:15

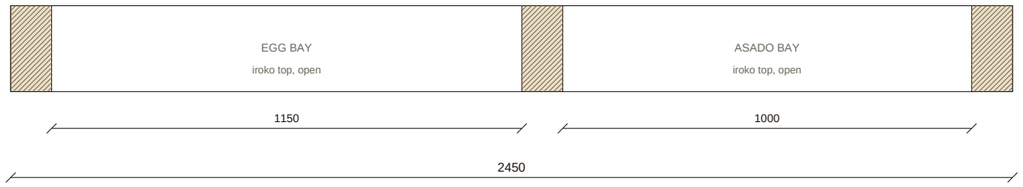

DEPTH ROD 1:15




Top overhangs 20 mm front, back and ends
Rails flush with the outer face of the posts


ROD NOTES

1. Rods are drawn at 1:5 and 1:10 on this sheet; the workshop rod is made full size from them.
2. Mark the post centres, rail levels and Egg bay width on the rod before any timber is cut.
3. Dimensions typical, confirmed against the Egg or kamado model [CHECK].


SECTIONS AT 1:4




Post




Top rail



Lower rail



Shelf slat



Oak top

TIMBER SCHEDULE - ENGLISH OAK

MEMBER	SECTION	NO.	LENGTH
Egg shelf board	107 x 20	10	7.6 m
Lower shelf slat	90 x 20	5	5.0 m
Lower rail	60 x 45	4	4.9 m
Post	100 x 100	6	4.3 m
Top rail	90 x 45	3	3.6 m
Egg shelf rail	60 x 45	2	2.6 m
Side rail	90 x 45	3	2.5 m
Lower side rail	60 x 45	3	2.5 m
Top board (glued panel)	40 thick x 840	2	2.5 m
Top rail	60 x 45	1	1.3 m

Quantities and lengths indicative, from the drawing model.
All [CHECK] with structural engineer and at site visit.

FIRE & OAK
OUTDOOR KITCHENS & SPACES

EGG & KAMADO TABLES

Egg and Asado Combination · XLarge Egg

Setting-out rods and full-size sections

DRAWING NO.	SCALE
FO-TBL-COMBOXL-C2	1:5 / 1:15 / 1:4
DATE	SHEET
07.10.2026	2 of 2

STATUS

PRELIMINARY · REV P2

For design intent. Not for construction.

Rods typical, to be confirmed.

Fire & Oak Outdoors
fireandoakoutdoors.co.uk
hello@fireandoakoutdoors.co.uk